


Electrofusion Fittings 125-225

Weldable fitting system for Flexalen[®] polybutene service pipes (PB-H) OD125, 160 and 225

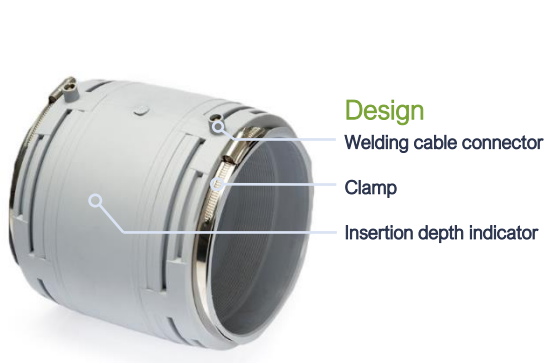

Application Instruction

Application conditions and pipe preparation

- Ambient temperature: +5 to +40°C
- No rainy or windy (≥ 3 bfr / 3.4-5.4 m/s) weather conditions } use a tent to create correct conditions if not already given
- Service pipe is cut straight and without damage, upper layer of the medium pipe is removed for the length of the insertion depth (see instruction leaflet for Georg Fischer scraper)
- Service pipe and fitting are free from dirt and condensation

IMPORTANT: FOR WELDING PROCESS ALWAYS FOLLOW THE INSTRUCTIONS SUPPLIED WITH THESE FITTINGS AND THE SCRAPER SET